

## applications

- Parks
- Gardens
- Entrances
- Office frontages
- Pedestrian areas

Auri™ is a stylish, 3.5m high stainless steel light pole. Using the unique 3M prismatic optical film to produce a soft, diffuse glow of light. With its modern look and white light from a 70W ceramic metal halide lamp, Auri™ enhances contemporary architecture by day and by night. Auri™ has been designed to IP65, using high quality materials like aluminium and 316 grade steel to create a luminaire that combines stylish looks with durability.



**features and benefits**

Contemporary styling

- > Aesthetic appeal to complement today's architecture

High quality construction

- > Durability
- > Fully weather sealed

Marine grade stainless steel body

- > No corrosion

**lamp type** included

70W PAR-30 metal halide

**IP rating**

P65 

**approvals**

Complies with EN60598


**CE**




**specification**

The luminaire shall consist of a cylindrical body made of 316 grade stainless steel and an acrylic diffuser housing an optical, prismatic, flexible film and a 70W PAR-30 ceramic metal halide lamp to produce a soft diffuse lighting effect. An anodised aluminium reflector at the top and an anodised aluminium top canopy shall complete the optical system. The luminaire body shall house all Integral control gear on an encapsulated gear tray and shall be designed to IP65. A maintenance door with support for mounting the junction box shall be located in the body at 65cm height. The luminaire shall be fixed to the ground via a base plate with four reinforcement brackets and fastening holes for M16 x 400mm bolts. The luminaire complies with EN60598.


**light distributions**



Photometric data is available at [www.holophane.co.uk](http://www.holophane.co.uk)

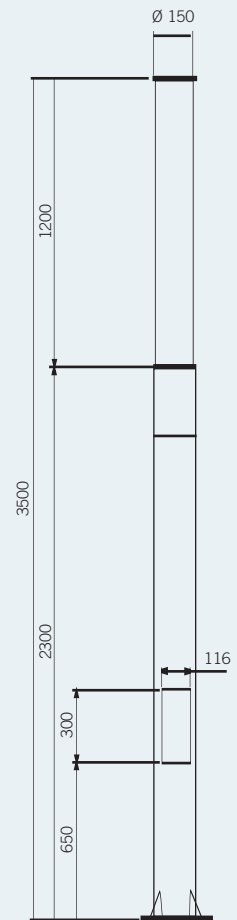

Auri Light Pole





ordering details : luminaire

**Code**

AURI Auri Light Pole

**Code**

**Lamp Type**

.P3070MFL 70W CDM-R PAR30 Ceramic Metal Halide Lamp (E27) base 40 Degree Beam

**Example**

AURI .P3070MFL

Note: Luminaires are supplied as standard for use on 240V 50Hz supply and complete with lamp. For 230V 50Hz add prefix 'N'. Other voltages available on request. Timed ignitors available on request.

**AURI.FT** Set of 4 bolts for flange base fixing. Must be ordered as accessory for every product when mounting with flange plate.