



Holophane External Lighting Application Guide

Parkpack

Open Carpark no perimeter lighting required

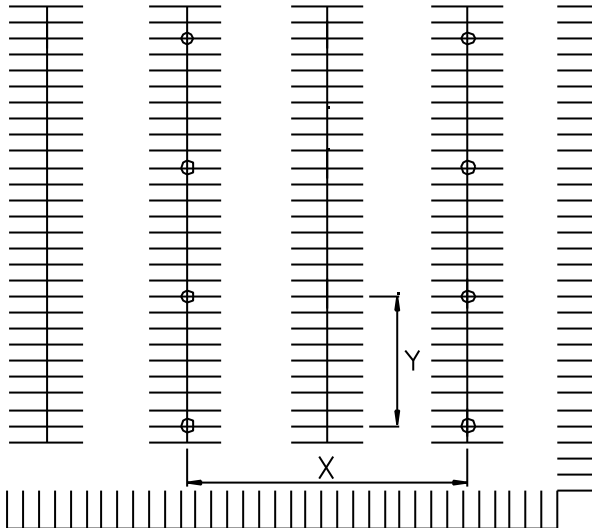

Roadway

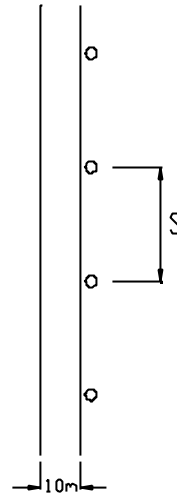

Holophane External Lighting Application Guide								
Selection Data				Design Solution				
	Area	Height(m)	Head Config.	Lamp Type	X (m)	Y (m)	S(m)	Cat No
Metal Halide	Road	6	2 head	150w MA			21.0	PRK150MA.AYSM
	Road	4	2 head	100w MA			15.0	PRK100MA.AYSM
	Road	3	-	-			-	-
	Open	6	2 head	150w MA	32.0	18.0		PRK150MA.SQSM
	Open	4	2 head	150w MA	32.0	14.0		PRK150MA.SQSM
	Open	3	2 head	100w MA	16.0	20.0		PRK100MA.SQSM
High Pressure Sodium	Road	6	2 head	150w HPS			27.0	PRK150XT.AYSM
	Road	4	1head	150w HPS			15.0	PRK150XT.AYSM
	Road	3	-	-			-	-
	Open	6	2 head	150w HPS	32.0	24.0		PRK150XT.SQSM
	Open	4	2 head	150w HPS	32.0	20.0		PRK150XT.SQSM
	Open	3	2 head	100w HPS	16.0	24.0		PRK100XT.SQSM

Design Constants

Illuminance 30 lux ave 10 lux min

Design at 2000 hour burn