


Holophane External Lighting Application Guide

Prismbeam

Service Yard

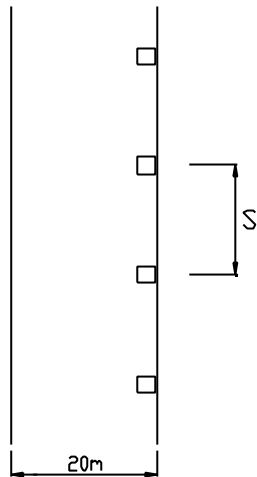

Holophane External Lighting Application Guide						
Selection Data			Design Solution			
	Area	Height(m)	Lamp Type	Tilt	S(m)	Cat No
White Light	Service Yard	14	400w MVR	45 Deg.	15.0	PBM400MV.W
	Service Yard	12	400w MVR	45 Deg.	17.0	PBM400MV.W
	Service Yard	10	400w MVR	45 Deg.	18.0	PBM400MV.W
High Pressure Sodium	Service Yard	14	400w HPS	45 Deg.	23.0	PBM400ST.W
	Service Yard	12	400w HPS	45 Deg.	25.0	PBM400ST.W
	Service Yard	10	400w HPS	50 Deg.	24.0	PBM400ST.W

Design Constants

Illuminance 50 lux average
 Design at 2000 hour burn