



Holophane External Lighting Application Guide

Vista

Open Carpark no perimeter lighting required

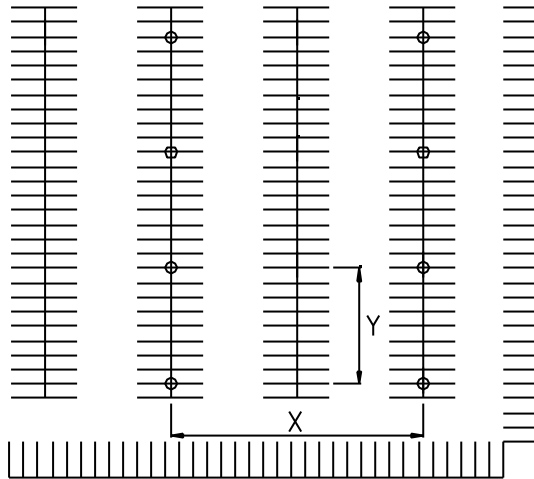

Roadway

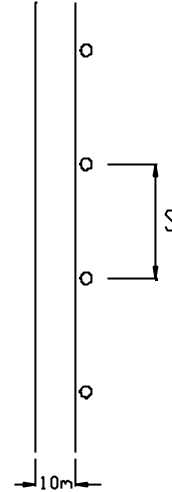

Holophane External Lighting Application Guide								
Selection Data				Design Solution				
	Area	Height(m)	Head Config.	Lamp Type	X (m)	Y (m)	S(m)	Cat No
Metal Halide	Road	10	2 head	250w HDPSP			38.0	VST250HDPSP.HA
	Road	8	2 head	250w HDPSP			39.0	VST250HDPSP.HA
	Road	6	1 head	250w HDPSP			28.0	VST250HDPSP.HA
	Open	10	3 head	250w HDPSP	32.0	52.0		VST250HDPSP.HS
	Open	8	2 head	250w HDPSP	32.0	35.0		VST250HDPSP.HS
	Open	6	2 head	250w HDPSP	32.0	31.0		VST250HDPSP.HS
High Pressure Sodium	Road	10	2 head	250w HPS			47.0	VST250HDPSP.HA
	Road	8	1 head	250w HPS			32.0	VST250HDPSP.HA
	Road	6	1 head	250w HPS			32.0	VST250HDPSP.HA
	Open	10	3 head	250w HPS	32.0	58.0		VST250XT.HG
	Open	8	2 head	250w HPS	32.0	37.0		VST250XT.HG
	Open	6	2 head	250w HPS	32.0	39.0		VST250XT.HG

Design Constants

Illuminance 30 lux ave 10 lux min

Design at 2000 hour burn