


FRAME




wall recessed

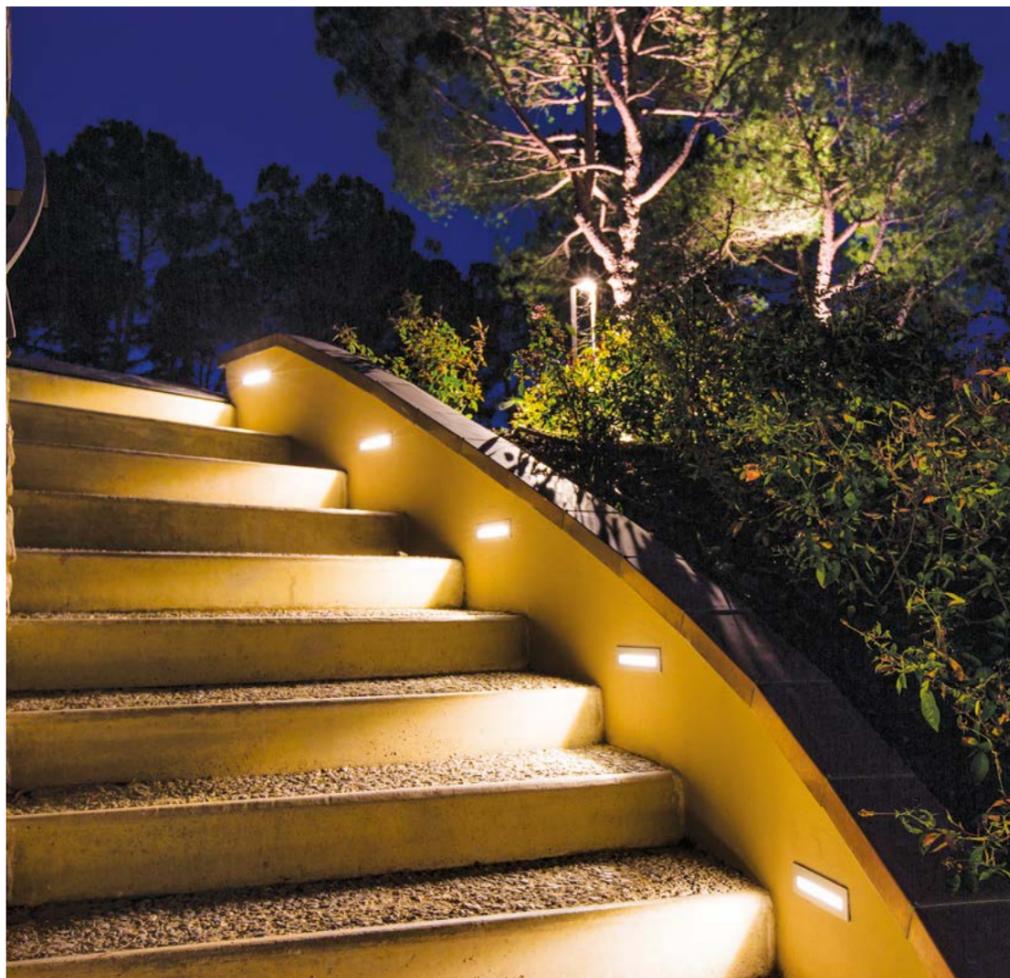

wall recessed

Wall recessed fitting with small size and rigorous essential design. Precisely for its tiny height, Frame becomes indispensable to light the steps being recessed into the lift. Also ideal for perimeter walls or as step marker, this is a product of great formal elegance. The thin central slot emits a light blade which is very impressive.

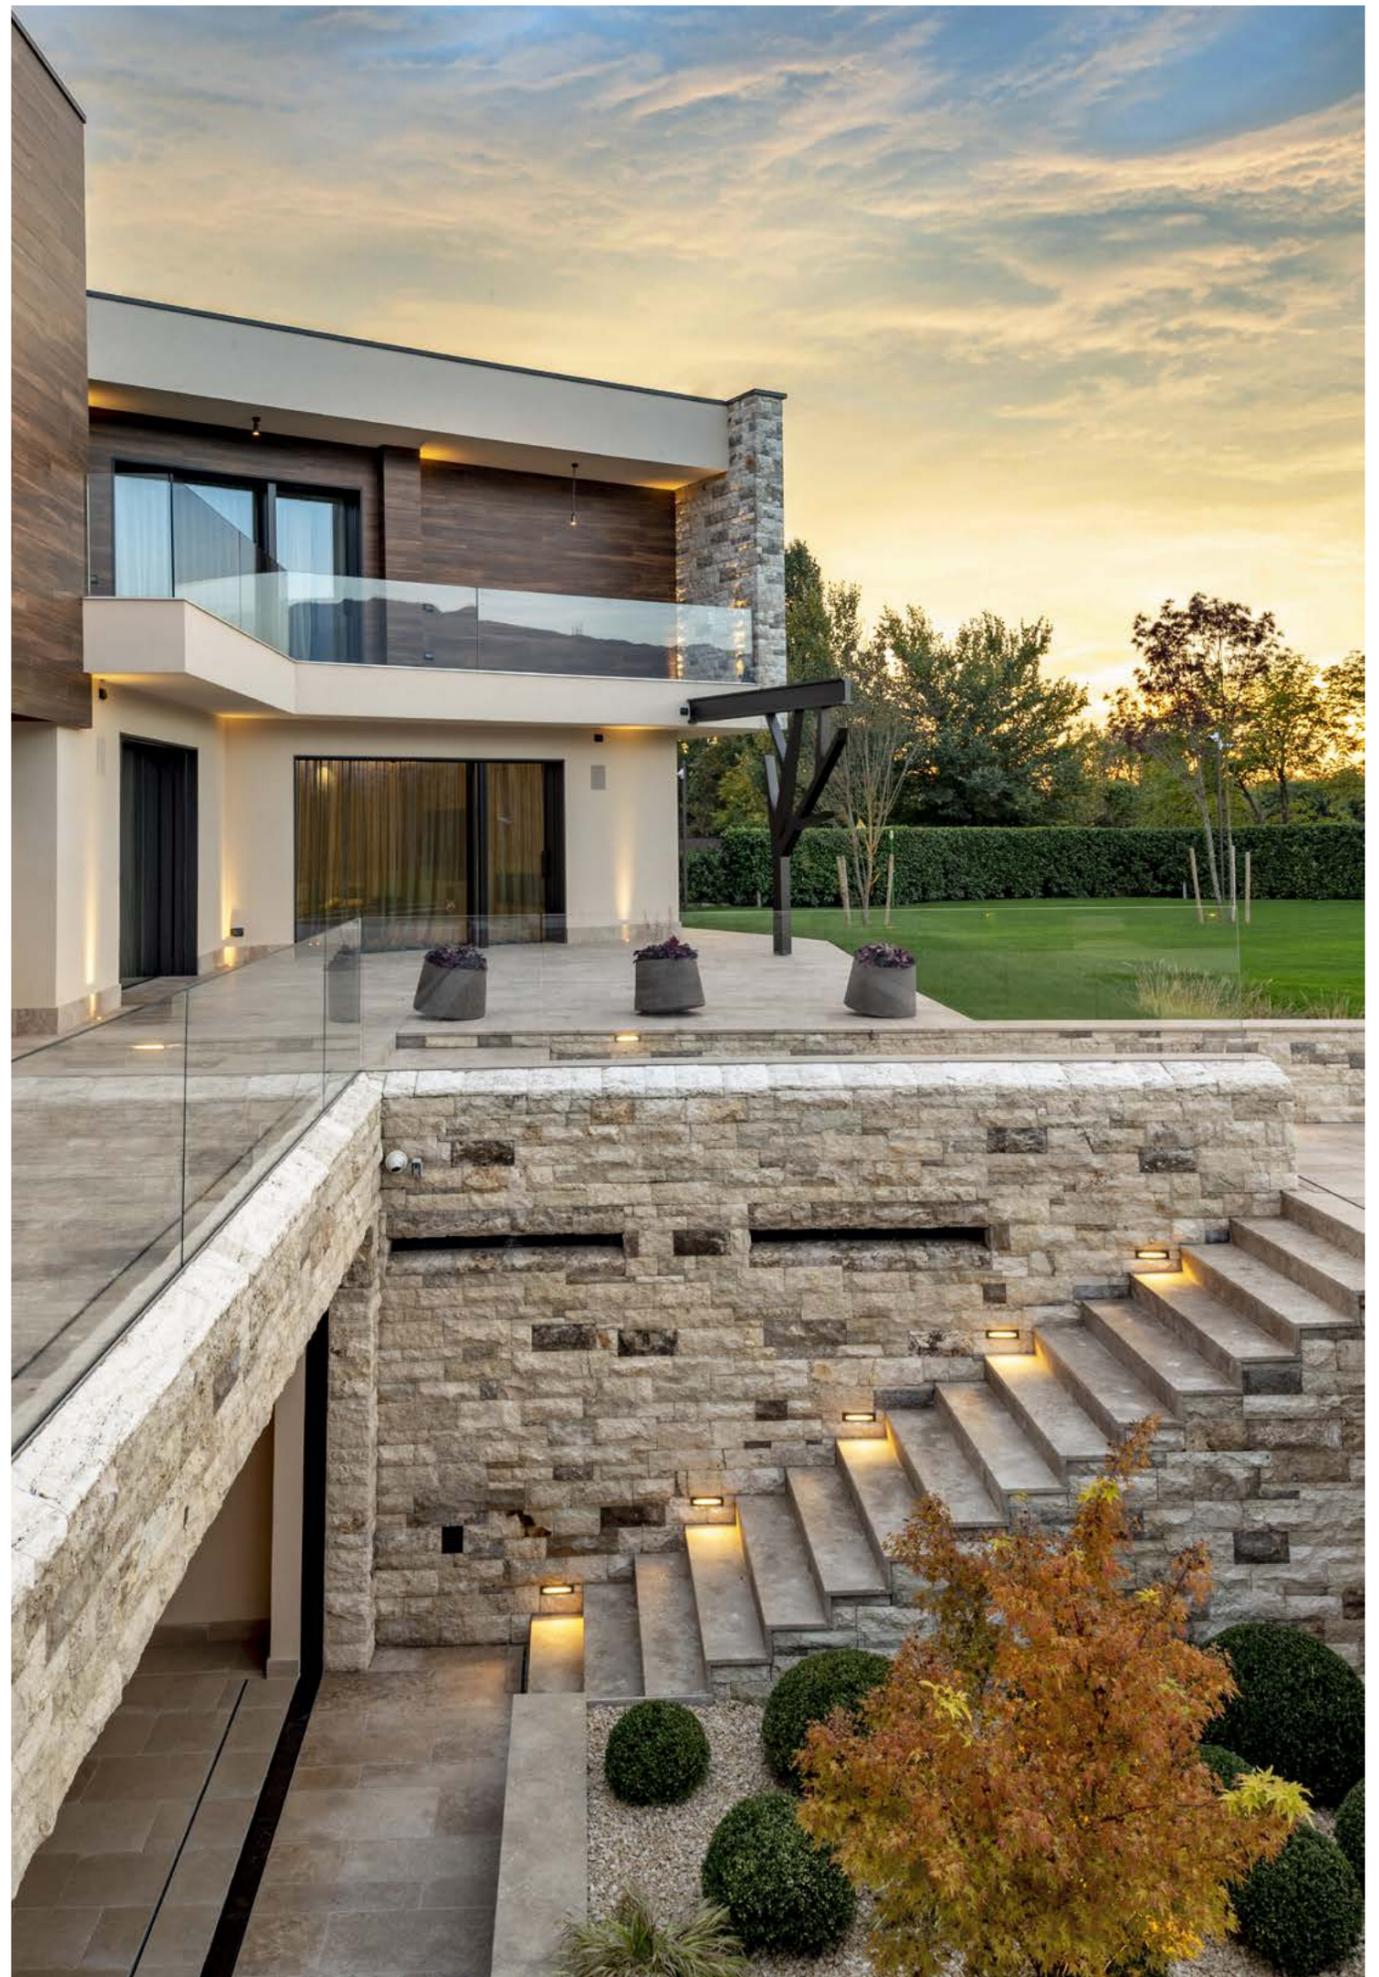

wall recessed

FRAME



wall recessed

IP65
IK 07

6 mm transparent
extra-clear glass

0,20 m cable length



WHITE LED

3000K CRI>80
220-240V 50/60Hz ⊕

2700K / 4000K
available on request



5W | 145 lm (*)
asymmetrical



107° x 47°
825 cd/klm

(*) Real Data

details

Die-cast body and flange made of aluminium alloy with very low copper content. Nylon outer casing to be ordered separately. The product is subjected to galvanic anodizing treatment divided into distinct phases: mechanical satin finishing, surface degreasing, anodic oxidation and finally fixing. Subsequently the product is painted by performing a double pass in-line process, which allows you to generate a single thick protective layer which then generates barrier against atmospheric agents and UV rays. This allows to achieve corrosion resistance performance in salt spray. Pre-treatment with atmospheric pressure plasma is carried out on the surface before gluing of the diffuser on Platek products.

standard finishes



.06 grey




.08 anthracite

on request finishes



.01 black



.02 white



.07 corten



.09 bronze